

FORKLIFT TRUCK

SCP300H4

STANDARD FEATURES

- Powered sliding cab
- Backup camera with object detection system
- Separate brake fluid and hydraulic oil tanks
- Enclosed cab with automatic climate control and with a high back
- Powerful Cummins engine

66,000 lbs

Rated Load Capacity

93,000 lbs

Weight Without Load




177"

Wheelbase

Cummins Diesel

Engine

DIMENSIONS

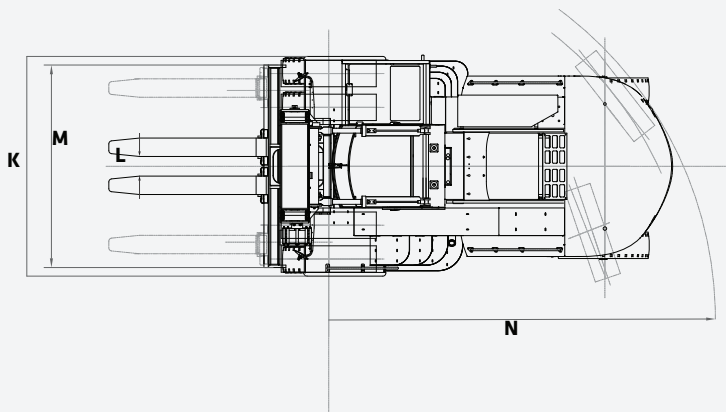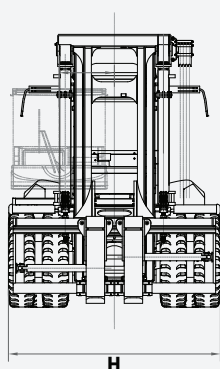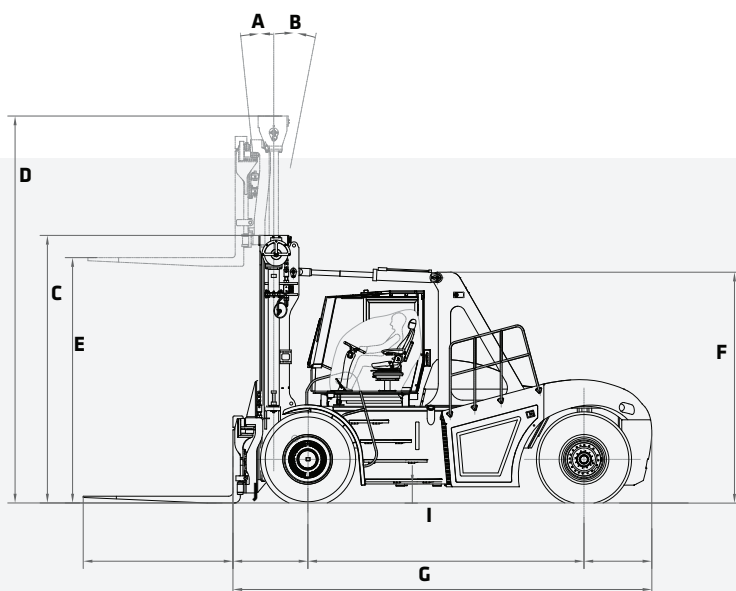

DIMENSIONS

MAST

A	Forward Tilt	5°	
B	Back Tilt	10°	
C	Height Lowered	172"	4 360 mm
D	Height Extended	248"	6 305 mm
E	Lift Height	157"	4 000 mm

OVERALL

F	Tilt Support Height	148"	3 760 mm
G	Length to Load Face	267"	6 825 mm
H	Width	141"	3 580 mm
I	Wheelbase	177"	4 500 mm
J	Load Distance	48"	1 220 mm

FORK

	Thickness	4.25"	110 mm
	Width	12"	300 mm
	Length	96"	2 440 mm

CARRIAGE

K	Width	141"	3 580 mm
---	-------	------	----------

FORK SPREAD

L	In-In Minimum	13"	320 mm
M	Out-Out Maximum	112"	2 850 mm

GROUND CLEARANCE

	Minimum Ground Clearance	12"	300 mm
--	--------------------------	-----	--------

AISE WIDTH

	With Load Length	400"	10 160 mm
--	------------------	------	-----------

TURNING RADIUS

N	Outside	248"	6 300 mm
---	---------	------	----------

PRODUCT SPECIFICATIONS FORKLIFT TRUCKS III SCP300H4



STANDARD AND OPTIONAL EQUIPMENT

s = standard / o = optional

SCP300H4	ENGINE
s	QSB 6.7l Cummins Diesel with 260HP @ 2200rpm
s	Tier 4 Final EPA Emissions Compliant
s	High Intake, Long Life Air Filter w/ Safety Element
s	Fuel Filter with Water Separator
s	Variable Geometry Turbocharger
s	500-Hr Engine-Oil-Change Interval
s	Electronic Controlled
s	24V, 100A Alternator
s	Turbocharger Protection via Engine Shut Off Delay
	DRIVETRAIN
s	Dana TE17 Transmission
s	3 FWD & 3 REV gears
s	Kessler D91 Drive Axle
s	Heavy Duty Wet Disc Brakes
s	Electronically Actuated Parking Brake
s	6 x 16.00-25 Pneumatic Tires
	MAST
s	Duplex Mast, MFH 157", OALH 172", EXT 248"
o	Duplex Mast, Various Heights
s	Hook Type Carriage
o	Apron Type Carriage
s	Independent Fork Positioner
s	Simultaneous Fork Positioner
o	Side Shift Carriage
s	96" x 12" x 4.3" Pin Type Forks
	CABIN
s	High Visibility Enclosed Cabin w/ Curved Glass
o	Grammer Air Suspension Seat
s	Climate Control with A/C and Heat
s	Ergonomic Multifunction Joystick
o	Individual Hydraulic Control Levers
s	Telescoping and Tilting Steering Column

STANDARD AND OPTIONAL EQUIPMENT

s = standard / o = optional

SCP300H4	CABIN (CONTINUED)
s	Steering Wheel Spinner Knob
o	Radio and Speaker Ready
s	Front, Rear and Top wiper
s	Top Retractable Sun Shade
s	12V/24V Power Supply
s	Push Button Applied Park Brake
o	Reading Light
s	Exterior Cabin Mounted Mirrors
s	Powered Sliding Cabin for Increased Visibility and Ease of Maintenance
	ACCESSORIES
o	Reverse Camera w/ 7" Color Display
s	Rear Object Detection Sensor up to 10"
s	Common Greasing Points for Steer Axle and Mast
s	Automatic Engine Fire Extinguisher
s	Locking Fuel Cap
o	Travel Speed Limiter
o	Integrated Tire Pressure Monitoring System
o	Extreme Cold Climate Package (Fuel, Engine and Hydraulics)
o	Customized Colors or Labels
s	Lockable Battery Disconnect Switch
s	Steer Wheel Lug Nut Protection
o	Rear Lifting Eyes
	LIGHTS
s	2 Front Fender Mounted LED Lights
s	2 Front Cab Mounted LED Lights
s	2 Rear Cab Mounted LED Lights
s	2 Mast Mounted LED Working Lights
o	Indicator and Hazard lights
o	Rotating Amber Beacon
o	Additional LED Lights

PRODUCT SPECIFICATIONS FORKLIFT TRUCKS ||| SCP300H4

WORKING RANGE

SPECIFICATIONS		
GENERAL		
Rated Load Capacity	66,000 lbs	30 000 kg
Load Center	48"	1 220 mm
Load Distance	48"	1 220 mm
Wheelbase	177"	4 500 mm
Hydraulic Tank Capacity		
Main	87 gal	330 l
Brake	26 gal	100 l
Fuel Tank Capacity	105 gal	400 l
WEIGHTS		
Total Truck Weight without Load	93,000 lbs	42 200 kg
Axle Loading with Load		
Front	148,000 lbs	67 200 kg
Rear	11,000 lbs	5 000 kg
Axle Loading without Load		
Front	46,300 lbs	21 000 kg
Rear	46,700 lbs	21 200 kg
WHEELS		
Tire Type	Pneumatic	
Tire Size		
Drive	16.00-25	
Steer	16.00-25	

LIFTING PERFORMANCE

PERFORMANCE		
SPEED		
Travel		
With Load	15.5 mph	25 km/h
Without Load	17.4 mph	28 km/h
Lifting		
With Load	49 ft/min	0.25 m/s
Without Load	59 ft/min	0.30 m/s
Lowering		
With Load	79 ft/min	0.40 m/s
Without Load	79 ft/min	0.40 m/s
DRAWBAR		
Pull-Max	44,500 lbf	198 kN
GRADEABILITY @ 1 MPH (1.6 KM/H)		
With Load	26%	

POWERTRAIN		
ENGINE		
Type	Cummins QSB 6.7 Diesel	
Emmissions Type	EPA Tier 4 Final	
Output		
Rated	260 hp	194 kW
Governed Speed	2,200 rpm	
Cylinders		
Number	6	
Disp	6.7 l	
Turbocharger	Variable geometry	
ALTERNATOR		
Amps	24V	120A
Drive Axle	Kessler D91	
Transmission	Dana TE17	
GEARS		
Forward	3	
Reverse	3	
BATTERY		
Capacity	2 x 12V 165 Ah	
BRAKES		
Service	Wet Disc	
Parking	Dry Disc	
TANK CAPACITY		
DEF	10 gal	38 l

MAST		
TYPE	Duplex	
*Height Maximum	157"	4 000 mm
*OALH	172"	4 360 mm
*Extended	248"	6 305 mm
*Freelift	-	-
Fork Type	Pin	
Carriage Type	Hook	

* All imperial numbers have been rounded to the nearest whole number.
*Multiple masts heights available up to 275" lift height.

In the interest of continual equipment development, SANY Canada Ltd. reserves the right to change these specifications at any time without prior notification.



MONTREAL (Head office)
100A, Hymus Blvd.
Pointe-Claire (Québec) H9R 1E4

Phone: 514 694-4223
Toll free: 1 866 421-4223
info@elevex.ca



QUEBEC
1279, Paul-Émile Giroux St. Suite
200 Québec (Québec) G1C 0K9

SAGUENAY
2305, Alexis-Le-Trotteur
St. Jonquière (Québec) G7X 9H8



elevex.ca