

Linde Material Handling

*Linde*

Member of KION Group

# FULL LINE PRODUCT CATALOG

2025



 **ELEVEX™**  
Material Handling Solutions



# STAY CHARGED STAY PRODUCTIVE

Introducing the Linde Integrated  
On-Board Charging Solution










Available on Linde Models E20BHP - E25BHP & E25SH - E35SH

## COUNTERBALANCED PRODUCTS

<b>CLASS I</b>	ELECTRIC COUNTERBALANCE		..... 1 - 4
<b>CLASS IV &amp; V</b>	I.C. COUNTERBALANCE		..... 4 - 7

## WAREHOUSE PRODUCTS

<b>CLASS III</b>	PALLET TRUCKS		..... 8 - 9
<b>CLASS III</b>	PALLET STACKERS		..... 10
<b>CLASS III</b>	CENTER RIDE TOW TRACTOR		..... 11
<b>CLASS VI</b>	TOW TRACTORS		..... 11
<b>CLASS II</b>	VERTICAL ORDER PICKING		..... 12
<b>CLASS II</b>	REACH TRUCKS		..... 12 - 13
<b>CLASS II</b>	TURRET TRUCKS		..... 13

## AUTOMATED PRODUCTS

	AUTOMATED GUIDED VEHICLES		..... 14
--	---------------------------	--	----------

## LINDE GUARDIAN

	OPERATOR AWARENESS ASSISTANCE SYSTEM		..... 15 - 16
--	--------------------------------------	--	---------------

# COUNTERBALANCED PRODUCTS



ELECTRIC COUNTERBALANCE

CLASS I



## Series 346

All drive components are contained in a completely sealed drive axle with an IP54 rating. The dual AC drive motors are mounted in-line, allowing for exceptional run times and minimal wear.

Model	Voltage	Load Capacity	Right-Angle Stack
E18 (3-wheel)	36 / 48	3,500 (lb.)	79.3 (in.)
E20 (3-wheel)	36 / 48	4,000	79.3
E20P (4-wheel)	36 / 48	4,000	85.8
E20C (4-wheel)	36 / 48	4,000	85.8

**PB** **ION**



## Series 1346

The electronically controlled drive and hydraulic functions optimize performance and feature three operational modes: Performance, Productivity, and Efficiency.

Model	Voltage	Load Capacity	Right-Angle Stack
E18S	36	3,500 (lb.)	68.2 (in.)
E20S	36	4,000	70.2

**PB** **ION**



## Series 1293

Take your first step in transitioning to an electric fleet with the 1293. This series is the best value for performance for an electric counterbalance in the Linde portfolio.

Model	Voltage	Load Capacity	Right-Angle Stack
E20BHP	80	4,000 (lb.)	96.9 (in.)
E25BHP	80	5,000	96.9

**ION**



## Series 1347

Linde's nested mast design, coupled with the lift chains and hydraulic hoses routed over top of the free lift cylinder maximizes both peripheral and through-the-mast visibility. This ensures the operator can see what is in front of them at all times.

Model	Voltage	Load Capacity	Right-Angle Stack
E25C	36 / 48	5,000 (lb.)	91.6 (in.)
E25CL	36 / 48	5,000	94.4
E27C	36 / 48	5,500	92.8
E27CL	36 / 48	5,500	95.6
E30C	36 / 48	6,000	94.0
E30CL	36 / 48	6,000	96.8
E32CL	36 / 48	6,500	97.9

**PB** **ION**

**PB** Available with lead acid batteries

**ION** Available with Li-ION batteries

Available with Solid Pneumatic Tires

Available with Pneumatic Tires

Available with Cushion Tires

# COUNTERBALANCED PRODUCTS

## CLASS I

## ELECTRIC COUNTERBALANCE



### Series 1276

Excellent visibility through the mast is a key element of forklift safety. It is accomplished with narrow, yet deep mast rails; maintaining strength and capacity without unnecessarily obstructing the view.

Model	Voltage	Load Capacity	Right-Angle Stack
E25S	80	5,000 (lb.)	95.8 (in.)
E25SH	80	5,000	95.8
E30S	80	6,000	95.9
E30SH	80	6,000	95.9
E35SH	80	7,000	96.1

PB ION



### Series 1252 E

Optimally suited for dynamic, indoor/outdoor applications with excellent maneuverability and compact design.

Model	Voltage	Load Capacity	Right-Angle Stack
E20	80/90	4,000 (lb.)	91.4 (in.)
E20/600H	90	4,400	92.7
E25	80/90	5,000	91.4
E25/600H	90	5,000	94.0
E25/600HL	90	5,500	99.8
E30	80/90	5,500	96.1
E30L	90	6,000	99.9
E30/600H	90	6,500	94.0
E30/600HL	90	6,500	99.8
E35L	80/90	7,000	102.0
E35HL	90	7,000	99.8

PB ION



### Series 1252 X

All drive components are contained in a completely sealed drive axle with an IP54 rating. The dual AC drive motors are mounted in-line, allowing for exceptional run times and minimal wear.

Model	Voltage	Load Capacity	Right-Angle Stack
X20/600	90	4,400 (lb.)	110.5 (in.)
X25	90	5,000	110.5
X30	90	6,000	112.0
X35	90	7,000	112.2

ION

# COUNTERBALANCED PRODUCTS



ELECTRIC COUNTERBALANCE

CLASS I



## Series 1254 E

Available with both lead-acid and Li-ION options, this series offers the next advancement of electric forklift technology at a higher capacity. Navigate through demanding indoor and outdoor applications from an ergonomic operator cabin, creating the ultimate balance between efficiency, flexibility, and comfort.

Model	Voltage	Load Capacity	Right-Angle Stack
E35/600H	80	7,700 (lb.)	108.7 (in.)
E40/600H	80	8,800	109.1
E40/600HL	80 / 90	8,800	114.1
E45/600H	80	9,900	109.1
E45/600HL	80 / 90	9,900	114.1
E50HL	80 / 90	10,000	114.1
E50/600HL	80 / 90	11,000	115.1

PB ION



## Series 1254 X

Take advantage of boosted performance on a Li-ION electric forklift. This series elevates the already high-performing electric counterbalance lift truck to meet the standards of existing Linde internal combustion trucks on the market. Combine the power of IC with the versatility of electric to launch your application into its next phase.

Model	Voltage	Load Capacity	Right-Angle Stack
X35/600	90	7,700 (lb.)	132.7 (in.)
X40/600	90	8,800	133.1
X45/600	90	9,900	133.1
X50/500	90	10,000	133.1
X50/600	90	11,000	133.1

ION



## Series 1279

The Linde energy management system ensures intelligent and economical energy consumption. The projected remaining operating time is automatically calculated for the operator.

Model	Voltage	Load Capacity	Right-Angle Stack
E60	80	13,000 (lb.)	229.0 (in.)
E70	80	15,000	230.4
E80	80	17,500	230.4
E80/900	80	17,500	240.5

PB ION

PB Available with lead acid batteries

ION Available with Li-ION batteries

Available with Solid Pneumatic Tires

Available with Pneumatic Tires

Available with Cushion Tires

# COUNTERBALANCED PRODUCTS

## CLASS I

## ELECTRIC COUNTERBALANCE



### Series 1471

Outfit your operation with our all-new all-electric heavy forklift: The Linde Series 1471. This truck is our response to the call-to-action for carbon footprint reduction. For the first time, operations in need of heavy material handling can be equipped with an entirely electric fleet.

This truck has been engineered for more than the environment in mind. Protect your workforce with improved all-around visibility, vehicle operation color display, and noise reduction which helps the operator stay aware of all nearby obstacles and pedestrians.

Model	Voltage	Load Capacity	Right-Angle Stack
E100/600	80 / 90	22,000 (lb.)	194.9 (in.)
E120/600	80 / 90	26,000	194.9
E140/600	80 / 90	30,000	196.3
E150/600	80 / 90	33,000	205.6
E160/600	80 / 90	35,000	205.6
E180/600	80 / 90	39,000	177.6
E180/900	80 / 90	39,000	223.8
E100/1200	80 / 90	22,000	196.3
E120/1200	80 / 90	26,000	205.6
E140/1200	80 / 90	30,000	214.2
E150/1200	80 / 90	33,000	223.8
E160/1200	80 / 90	35,000	223.8



## CLASS IV & V

## INTERNAL COMBUSTION COUNTERBALANCE



### Series 391

The exclusive unique, top-mounted tilt cylinders provide smooth precision and control of the load. The result: high stability, fewer shocks, and less noise thanks to maintenance-free cushioning.

Model	Power Unit	Load Capacity	Right-Angle Stack
H16T	LPG	3,000 (lb.)	97.9 (in.)
H16D	Diesel	3,000	97.9
H16CT	LPG	3,000	97.9
H16CD	Diesel	3,000	97.9
H18T	LPG	3,500	98.1
H18D	Diesel	3,500	98.1
H18CT	LPG	3,500	98.1
H18CD	Diesel	3,500	98.1
H20T	LPG	4,000	98.1
H20D	Diesel	4,000	98.1
H20CT	LPG	4,000	98.1
H20CD	Diesel	4,000	98.1
H20CT/600	LPG	4,500	98.1
H20CD/600	Diesel	4,500	98.1



Class IV & Class V

# COUNTERBALANCED PRODUCTS



INTERNAL COMBUSTION COUNTERBALANCE

CLASS IV & V



## Series 1202

Thanks to the optimized design of the chassis, cabin, and mast, drivers now have an even better view in all directions. The particularly narrow A-pillar gives the driver good visibility of the load and their surroundings. The lowered front plate also improves the visibility of the forks and the load. The Linde Series 1202 is designed for efficiency, with the driver in mind.

Model	Power Unit	Load Capacity	Right-Angle Stack
H20D/600	Diesel	4,500 (lb.)	109.7 (in.)
H20T/600	LPG	4,500	109.7
H25D	Diesel	5,000	111.4
H25T	LPG	5,000	111.4
H25D/600	Diesel	5,500	113.0
H25T/600	LPG	5,500	113.0
H30D	Diesel	6,000	113.7
H30T	LPG	6,000	113.7
H35D	Diesel	7,000	115.3
H35T	LPG	7,000	115.3

**DIESEL** **LPG**



## Series 1204

Robust design and maintenance-free components guarantee high vehicle availability and low operating costs.

Model	Power Unit	Load Capacity	Right-Angle Stack
H35D/600	Diesel	7,700 (lb.)	127.6 (in.)
H35T/600	LPG	7,700	127.6
H40D	Diesel	8,800	128.0
H40T	LPG	8,800	128.0
H45D/600	Diesel	9,900	130.6
H45T/600	LPG	9,900	130.6
H50D	Diesel	10,000	130.6
H50T	LPG	10,000	130.6
H50D/600	Diesel	11,000	132.3
H50T/600	LPG	11,000	132.3

**DIESEL** **LPG**



## Series 1320

The Linde HT25T internal combustion forklift is designed and built in the USA to excel in ergonomic, efficiency, and maintenance standards.

Model	Power Unit	Load Capacity	Right-Angle Stack
HT25T	LPG	5,000 (lb.)	111.1 (in.)
HT30T	LPG	6,000 (lb.)	111.1
HT35T	LPG	7,000 (lb.)	111.1

**LPG**

Available with Solid Pneumatic Tires

Available with Pneumatic Tires

Available with Cushion Tires

# COUNTERBALANCED PRODUCTS

## CLASS V

## INTERNAL COMBUSTION COUNTERBALANCE



### Series 396

Powerful and agile: two fitting descriptions for the machines of the Linde Series 396. The customer driven design of Linde's high performance hydrostatic trucks make them versatile and cost effective even in the harshest environments.

Linde Series 396 hydrostatic trucks have been designed to match constantly changing customer applications. Linde MH will make every effort to develop and apply technology by designing and manufacturing reliable, more productive, and durable forklifts

Model	Power Unit	Load Capacity	Right-Angle Stack
H60D	Diesel	13,000 (lb.)	150.3 (in.)
H70D	Diesel	15,000	150.7
H80D	Diesel	17,000	150.7
H80D/900	Diesel	17,500	164.6
H80D/1100	Diesel	17,500	178.0



### Series 1401

Operators perform best when working conditions are perfect, just as they are on a Linde Series forklift. The Series 1401 was designed throughout to make the task easier, more efficient, and user-friendly for the operator.

Model	Power Unit	Load Capacity	Right-Angle Stack
H100	Diesel	22,000 (lb.)	194.1 (in.)
H120	Diesel	26,000	194.1
H120/1200	Diesel	26,000	211.8
H140	Diesel	31,000	195.4
H140/1200	Diesel	31,000	213.6
H150	Diesel	33,000	195.4
H160	Diesel	35,000	211.8
H160/1200	Diesel	35,000	225
H180	Diesel	40,000	211.8



# COUNTERBALANCED PRODUCTS



INTERNAL COMBUSTION COUNTERBALANCE

CLASS V



## Series 1411

The new Linde range of forklift trucks feature high-quality, well-known, robust, and reliable components that have been thoroughly tested in numerous material handling and heavy-duty, off-road applications to ensure a long operational life.

Model	Power Unit	Load Capacity	Right-Angle Stack
HT100D/600	Diesel	22,000 (lb.)	194.8 (in.)
HT100D/1200	Diesel	22,000	196.3
HT120D/600	Diesel	26,000	194.8
HT120D/1200	Diesel	26,000	205.6
HT140D/600	Diesel	31,000	196.3
HT140D/1200	Diesel	31,000	211.2
HT150D/600	Diesel	33,000	205.6
HT150D/1200	Diesel	33,000	223.8
HT160D/600	Diesel	35,000	205.6
HT160D/1200	Diesel	35,000	223.8
HT180D/600	Diesel	40,000	212.5
HT180D/900	Diesel	40,000	223.8

DIESEL



### Series 1131

The MT12 features an effective parking brake to hold the truck on slopes or on truck tail lifts. A robust metal bumper protects the drive unit and components, while the low-profile chassis still allows dockboard use.

Model	Voltage	Load Capacity	Wheelbase
MT12	24	2,600 (lb.)	44.1 (in.)

**ION**



### Series 1133

The dual butterfly control levers on the ergonomic tiller head ensure precision traction control with either hand. A built-in charger enables opportunity charging at any convenient power point for optimum uptime.

Model	Voltage	Load Capacity	Wheelbase
MT15	24	3,300 (lb.)	48.5 (in.)

**PB**



### Series 8932

Equipped with a 20Ah Li-ION battery and on-board charger, this pallet jack can find its home in any operation in need of material handling with easy and quick charging capabilities. Or, replace the on-board charger with a second Li-ION battery to keep the MT15B active over multi-shift works.

Model	Voltage	Load Capacity	Wheelbase
MT15B	24	3,300 (lb.)	46.7 (in.)

**ION**



### Series 1133-03

The MT18 features a multifunction display hour meter, maintenance indication, battery discharge indicator, and internal fault code indication.

Model	Voltage	Load Capacity	Wheelbase
MT18	48	4,000 (lb.)	48.0 (in.)

**ION**



### Series 1151

The combination of AC motor technology and Linde LAC digital control makes these pallet trucks highly productive. Operating parameters can be adjusted to match customer requirements and application.

Model	Voltage	Load Capacity	Wheelbase
T20	24	4,400 (lb.)	56.6 / 59.2 (in.)

**PB**

# WAREHOUSE PRODUCTS



## PALLET TRUCKS

## CLASS III



### Series 8903

Powered by the AC drive motor, the Linde Series 8903 minimizes operator output and promotes a strain-free working environment. In addition, the parking brake applies immediately when the tiller arm is released, protecting the operator from unintended injury.

Model	Voltage	Load Capacity	Wheelbase
MT20	24	4,500 (lb.)	55.8 (in.)

**PB**



### Series 8932

Introduce your operation to a small-sized heavy-lifter. Easily maneuver the powerful MT22 in tight working conditions.

Model	Voltage	Load Capacity	Wheelbase
MT22	24	4,500 (lb.)	51.1 (in.)

**ION**



### Series 1101

The largest operator foot space in its class with a premium floor mat ensures enough space to comfortably change foot positioning.

Model	Voltage	Load Capacity	Operation
EW30	24	6,000 (lb.)	Walk
EW30	24	6,000	Walk/Ride
EW40	24	8,000	Walk
EW40	24	8,000	Walk/Ride

**PB ION**



### Series 1102

The operator control handle features a heavy-duty cast design / steel poly construction. Soft-touch accelerator twist grips govern travel direction, speed, and features automatic return to neutral.

Model	Voltage	Load Capacity	Wheelbase
ECR30	24	6,000 (lb.)	Varies
ECR40	24	8,000	Varies

**PB ION**



Available with lead acid batteries



Available with Li-ION batteries



### Series 1169

The EWS cast frame and overall rigid design makes this unit extremely stable, allowing for industry best residual capacity.

Model	Voltage	Load Capacity	Wheelbase
EWS10	24	2,000 (lb.)	49.0 (in.)
EWS12	24	2,500	49.0
EWS14HD	24	3,000	49.0

PB



### Series 8907

Low fatigue operation. All operator controls are accessible without having to lift the hand from the handle, creating less operator fatigue.

Model	Voltage	Load Capacity	Wheelbase
ML14ASX	24	3,000 (lb.)	54.9 (in.)

PB



### Series 8908

All operator controls are accessible without having to lift the hand from the handle, creating less operator fatigue.

Model	Voltage	Load Capacity	Wheelbase
ML20AS	24	4,000 (lb.)	Varies

PB



### Series 1173

The hand guards on the control handle effectively shield the hands and keep the operator positioned within the truck's contours with excellent visibility through the mast.

Model	Voltage	Load Capacity	Wheelbase
L14	24	3,000 (lb.)	44.5 (in.)
L16	24	3,500	44.5
L20	24	4,400	56.1

PB

# WAREHOUSE PRODUCTS



## CENTER RIDE TOW TRACTOR

## CLASS III



### Series 1103

Truck frames feature fixed platform height and all seam-welded unitized construction. Plate steel contoured to shape for rigid strength provides maximum durability and protection for all vital components.

Model	Voltage	Load Capacity	Wheelbase
ETR50	24	10,000 (lb.)	55.3 (in.)
ETR75	24	15,000	55.3

**ION**



## TOW TRACTORS

## CLASS VI



### Series 1191

The independent, all wheel suspension gives this truck improved maneuverability and excellent stability. The regenerative braking prolongs battery run-time and ensures truck availability throughout the day.

Model	Voltage	Load Capacity	Wheelbase
P60	48	10,000 (lb.)	49.9 (in.)
P80	48	17,600	57.7

**PB ION**



### Series 5007

The powerful Linde P250 is an electric tow tractor engineered for higher capacity towing loads. Available with a short wheelbase (SWB) for high maneuverability, or a long wheelbase (LWB) for especially high directional stability.

Model	Voltage	Load Capacity	Wheelbase
P250 SWB	48	10,000 (lb.)	49.9 (in.)
P250 LWB	48	17,600	57.7

**PB**

## CLASS II

## VERTICAL ORDER PICKING



### Series 5021

High-powered motors provide fast operational speeds and controls are ergonomically designed to combine technology and ergonomic purpose to maximize productivity.

Model	Voltage	Load Capacity	Wheelbase
V10	24	2,200 (lb.)	55.3 (in.)

**PB ION**



### Series 1355

Large operator foot room and brake area with a premium floor mat, ensure enough space to comfortably change foot positioning throughout the day.

Model	Voltage	Load Capacity	Wheelbase
V15	24	3,000 (lb.)	51.6 (in.)
V15	36	3,000	51.6

**PB ION**



### Series 8906

The Linde Series 8906 can elevate an operator up to as much as 192" from the floor, turn around in as little as 72", and can be driven at height to move from task to task.

Model	Voltage	Load Capacity	Min. Turn Aisle
MV05	24	1,000 (lb.)	72.0 (in.)

**PB**

## CLASS II

## REACH TRUCKS



### Series 1395

Comfort and visibility in all load handling functions are enhanced with a clear view, armored glass overhead guard. The operator does not have to lean outside the frame of the truck to see loads at extended heights.

Model	Voltage	Load Capacity	Wheelbase
R15SX	36	3,000 (lb.)	60.9 (in.)
R17SX	24	3,500	58.9
R17SX	36	3,500	60.9
R22SX	36	4,500	60.9

**PB ION**

# WAREHOUSE PRODUCTS



## REACH TRUCKS

### CLASS II



### Series 1120

The R14 – R20 is an extremely versatile truck, designed for the widest possible range of applications: Tailor-made, cost-effective, and highly-productive narrow aisle storage solutions.

Model	Voltage	Load Capacity	Wheelbase
R14S	48	3,000 (lb.)	50.2 (in.)
R14G	48	3,000	50.2
R16S	48	3,500	54.5
R16SN	48	3,500	54.5
R16SHD	48	3,500	54.5
R16G	48	3,500	54.5
R20S	48	4,500	59.8
R20S	48	4,500	59.8
R20SW	48	4,500	59.8
R20G	48	4,500	59.8

**PB** **ION**



## TURRET TRUCKS

### CLASS II



### Series 5224

Linde A Man-down range is a versatile VNA system truck designed for high density storage and retrieval of unit loads in very narrow aisles.

Model	Voltage	Load Capacity	Wheelbase
A-Modular	48	2,200 (lb.)	62.8 (in.)
A-Modular	48	3,000	68.4
A-Modular	48	3,300	76.5

**ION**



### Series 5231

The unique modular design ensures that an individual K truck's specification can be tailored to match the application precisely in order to maximize productivity at all times. The smart electronics of Linde System Control (LSC) continuously monitors the truck's technical potential in order to deliver optimum simultaneous lift and travel speeds relative to lift height and load weight.

Model	Voltage	Load Capacity	Wheelbase
K-Modular	48/80	2,200 (lb.)	62.4 (in.)
K-Modular	48/80	2,500	62.4
K-Modular	48/80	2,500	62.4
K-Modular	80	2,850	68.1
K-Modular	80	3,300	77.3

**PB** **ION**

# AUTOMATED PRODUCTS

## AUTOMATED GUIDED VEHICLES



### P-MATIC

#### Automated Tugger Train

The Linde P-MATIC is the automated tugger-train specializing in high volume horizontal material transport

Model	Load Capacity	Cart Width	Cart Capacity
P-MATIC	11,000 (lb.)	40 - 70 (in.)	Up to 6 Carts



### L-MATIC AC

#### Automated Counter Balanced Stacker

Automate point-to-point movements from deep lanes and conveyor, to stretch wrappers and low-level racking.

Model	Load Capacity	Aisle Width (GMA)	Lift Height
L-MATIC AC	2,200 (lb.)	137 (in.)	9.5 (ft.)



### R-MATIC

#### Automated Reach Truck

The Linde R-MATIC is the automated narrow aisle counterbalanced forklift specializing in high-level narrow aisle storage.

Model	Load Capacity	Aisle Width (GMA)	Lift Height
R-MATIC	3,500 (lb.)	150 (in.)	33 (ft.)



### K-MATIC

#### Automated Turret Truck

The K-MATIC is Linde's automated very narrow aisle (VNA) turret truck specializing in high density very narrow aisle pallet storage.

Model	Load Capacity	Min. Aisle Width	Lift Height
K-MATIC	3,000 (lb.)	72 (in.)	40 (ft.)

# LINDE GUARDIAN



## OPERATOR AWARENESS ASSISTANCE SYSTEM

The Linde Guardian system assists all personnel involved in internal traffic. The systems can see around corners and can be programmed to suit any hazardous scenario. By use of truck, infrastructure and pedestrian units, the product provides full-service awareness technology.



### HAZARDOUS WORKPLACE ZONES FOR INDUSTRIAL TRUCKS AND PEDESTRIANS

At corners, junctions or hall entrances, industrial trucks can pose a risk to pedestrians. The Linde Guardian system provides advance warnings to both the operator and pedestrians. The warning signal can be transmitted through walls and racking, and is accurate to within 10 centimeters. Warnings are only triggered when there is a clear danger, thus avoiding false alarms. An additional option reduces the travel speed in the event of danger, if necessary in a certain direction: if a person passes in front of a reversing forklift, the vehicle is not slowed down.



### EXCESSIVE SPEED

Accidents can occur if industrial trucks travel too fast through areas where pedestrian personnel are working or walking. Long, straight stretches can also tempt truck operators to exceed a safe travel speed. The Linde Guardian system automatically reduces travel speed in these critical areas.




### COLLISIONS WITH THE INFRASTRUCTURE

With Linde Guardian, high-speed doors open and close automatically. This prevents collisions, saves heating energy, and reduces cases of illness as a result of drafts. Approaching forklifts are slowed down in time so that the door is fully open by the time they pass through. An additional sensor warns if the mast is not retracted. The gates themselves can be equipped with round or rectangular warning zones. Rectangular zones ensure that only the desired gate opens when gates are next to each other. They also ensure that vehicles can work directly at gate entrances without the gate opening.



### MULTI-TRUCK ACCIDENTS

Collisions between trucks can occur at crossing points where visibility is poor or restricted. In these circumstances the Linde Guardian system warns all the truck operators in these zones, of the other trucks' presence in their immediate vicinity. The Truck Unit displays from which direction trucks are approaching. The minimum distance between trucks before a warning is triggered is adjustable.

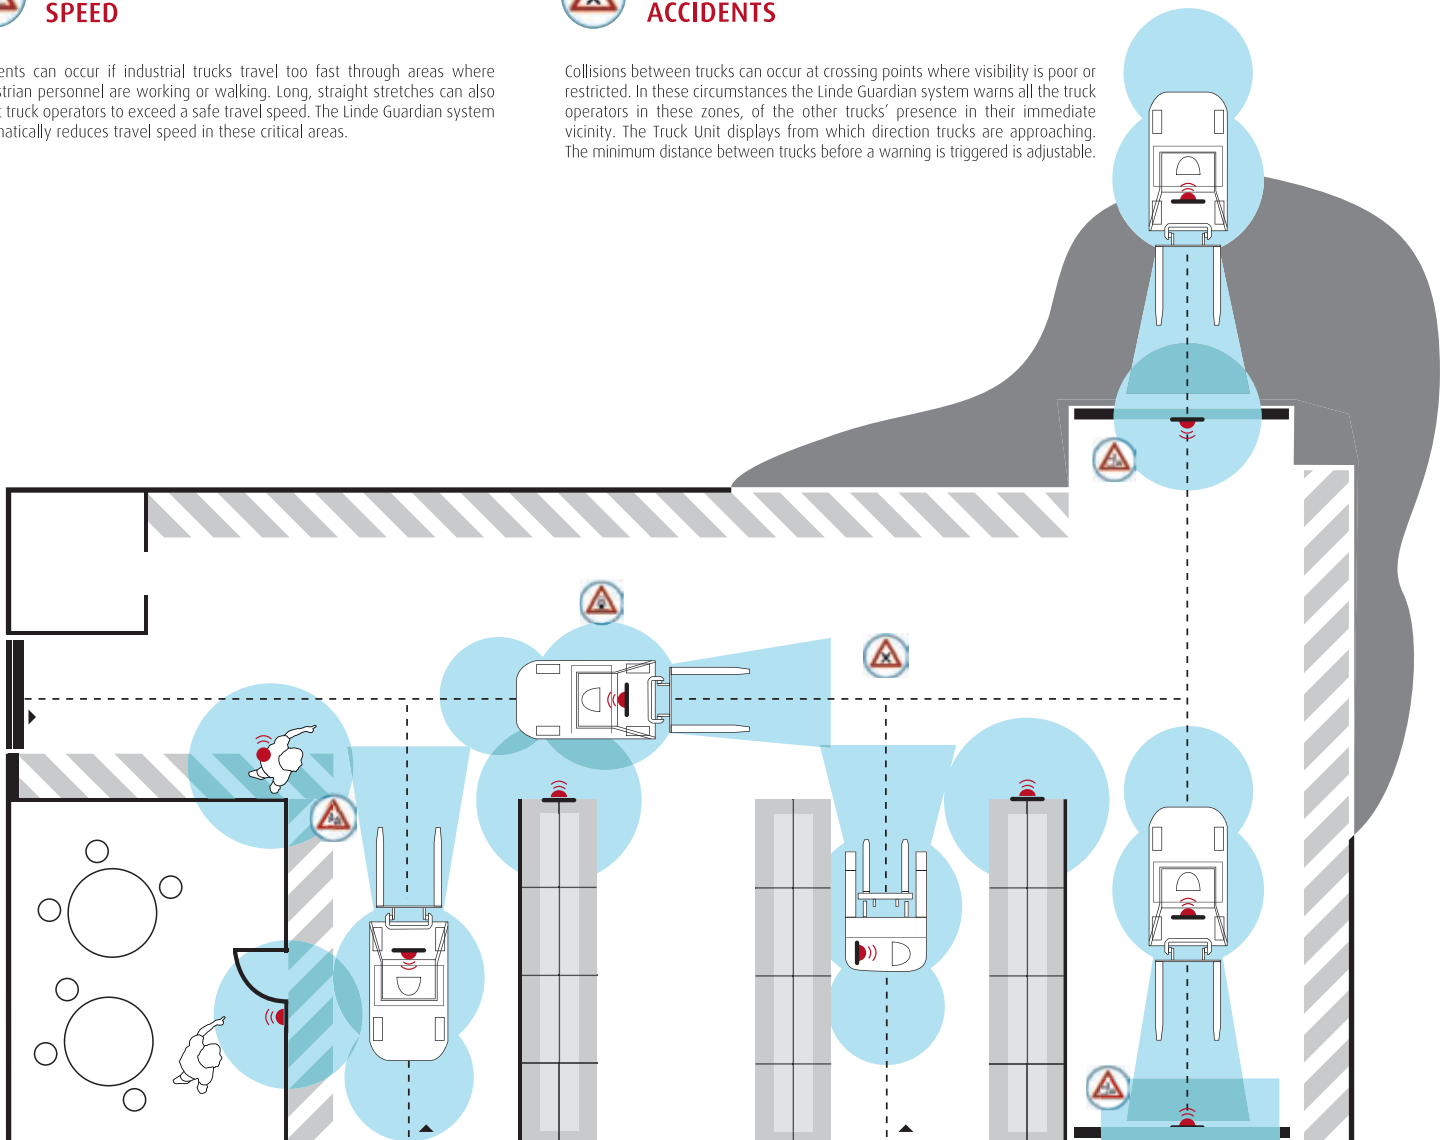



## Truck Unit Display

The Truck Unit warns the industrial truck operator via LED lights and acoustic signals.



## Truck Unit Small

The Truck Unit small is attached to the forklift and communicates with stationary modules such as the Static Unit or the Zone Marker.



## Zone Marker

The Zone Marker defines speed-restriction areas.



## Sensors

Detect the modules carried by pedestrians and industrial trucks in the defined potentially hazardous zones.



## Static Unit Display

The Static Unit marks hazardous zones in critical areas such as access doors or low visibility intersections. This module warns the environment via acoustic signals and LED lights.



## Portable Unit

The Portable Unit warns personnel of approaching industrial trucks using acoustic signals, LED lights and vibration.



## Charger

The Charger charges the Portable Unit inductively. The fully automatic activation ensures optimum ease of operation.



**Member of KION Group**

## About Linde Material Handling

Founded in 1904, Linde Material Handling ranks among the world's foremost makers of forklift trucks and automated material handling solutions. With offices & manufacturing facilities in South Carolina, U.S.A., the company proudly produces material handling solutions known for innovative technologies, reduced energy consumption, and low operating costs. Linde sells and supports these solutions with an independent dealer network, offering best-in-class after-sales support, parts, and financing across North America.



**MONTREAL (Head office)**  
19151 A, Cruickshank Avenue  
Baie-D'Urfé (Québec) H9X 3N9  
Phone: 418 694-4223  
Toll free: 1 866 421-4223  
[info@elevex.ca](mailto:info@elevex.ca)  
[elevex.ca](http://elevex.ca)

**QUEBEC**  
1279, Paul-Émile Giroux St. Suite 200  
Québec (Québec) G1C 0K9

**SAGUENAY**  
2305, Alexis-Le-Trotteur  
St. Jonquière (Québec) G7X 9H8

