

# FORKLIFT TRUCK

# SCP300H4

## STANDARD FEATURES

- ➔ Powered sliding cab
- ➔ Backup camera with object detection system
- ➔ Separate brake fluid and hydraulic oil tanks
- ➔ Enclosed cab with automatic climate control and with a high back
- ➔ Powerful Cummins engine

**66,000 lbs**

Rated Load Capacity

**93,000 lbs**

Weight Without Load




**177"**

Wheelbase

**Cummins Diesel**

Engine

## DIMENSIONS

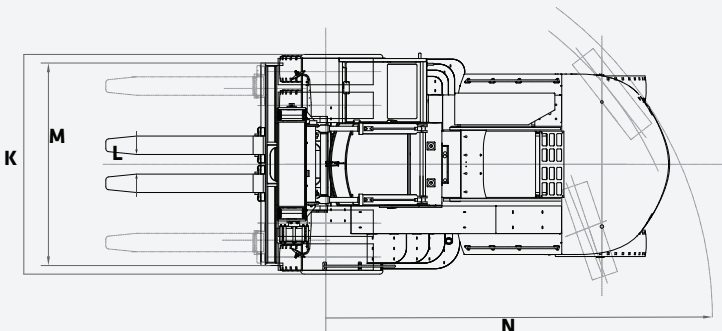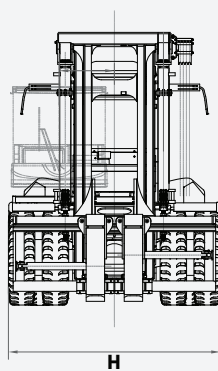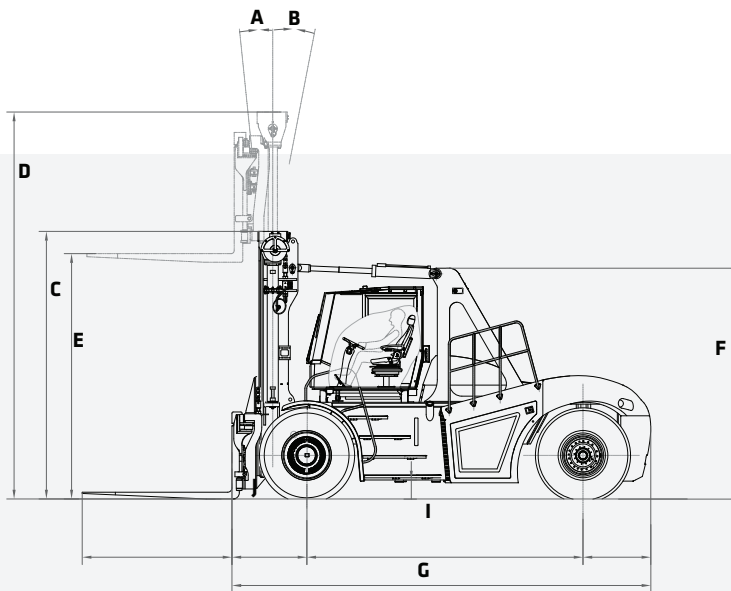

### DIMENSIONS

#### MAST

A	Forward Tilt	5°	
B	Back Tilt	10°	
C	Height Lowered	172"	4 360 mm
D	Height Extended	248"	6 305 mm
E	Lift Height	157"	4 000 mm

#### OVERALL

F	Tilt Support Height	148"	3 760 mm
G	Length to Load Face	267"	6 825 mm
H	Width	141"	3 580 mm
I	Wheelbase	177"	4 500 mm
J	Load Distance	48"	1 220 mm

#### FORK

	Thickness	4.25"	110 mm
	Width	12"	300 mm
	Length	96"	2 440 mm

#### CARRIAGE

K	Width	141"	3 580 mm
---	-------	------	----------

#### FORK SPREAD

L	In-In Minimum	13"	320 mm
M	Out-Out Maximum	112"	2 850 mm

#### GROUND CLEARANCE

	Minimum Ground Clearance	12"	300 mm
--	--------------------------	-----	--------

#### AISLE WIDTH

	With Load Length	400"	10 160 mm
--	------------------	------	-----------

#### TURNING RADIUS

N	Outside	248"	6 300 mm
---	---------	------	----------

s = standard / o = optional

SCP300H4	ENGINE
s	QSB 6.7l Cummins Diesel with 260HP @ 2200rpm
s	Tier 4 Final EPA Emissions Compliant
s	High Intake, Long Life Air Filter w/ Safety Element
s	Fuel Filter with Water Separator
s	Variable Geometry Turbocharger
s	500-Hr Engine-Oil-Change Interval
s	Electronic Controlled
s	24V, 100A Alternator
s	Turbocharger Protection via Engine Shut Off Delay
DRIVETRAIN	
s	Dana TE17 Transmission
s	3 FWD & 3 REV gears
s	Kessler D91 Drive Axle
s	Heavy Duty Wet Disc Brakes
s	Electronically Actuated Parking Brake
s	6 x 16.00-25 Pneumatic Tires
MAST	
s	Duplex Mast, MFH 157", OALH 172", EXT 248"
o	Duplex Mast, Various Heights
s	Hook Type Carriage
o	Apron Type Carriage
s	Independent Fork Positioner
s	Simultaneous Fork Positioner
o	Side Shift Carriage
s	96" x 12" x 4.3" Pin Type Forks
CABIN	
s	High Visibility Enclosed Cabin w/ Curved Glass
o	Grammer Air Suspension Seat
s	Climate Control with A/C and Heat
s	Ergonomic Multifunction Joystick
o	Individual Hydraulic Control Levers
s	Telescoping and Tilting Steering Column

STANDARD AND OPTIONAL EQUIPMENT

s = standard / o = optional

SCP300H4	CABIN (CONTINUED)
s	Steering Wheel Spinner Knob
o	Radio and Speaker Ready
s	Front, Rear and Top wiper
s	Top Retractable Sun Shade
s	12V/24V Power Supply
s	Push Button Applied Park Brake
o	Reading Light
s	Exterior Cabin Mounted Mirrors
s	Powered Sliding Cabin for Increased Visibility and Ease of Maintenance
ACCESSORIES	
o	Reverse Camera w/ 7" Color Display
s	Rear Object Detection Sensor up to 10"
s	Common Greasing Points for Steer Axle and Mast
s	Automatic Engine Fire Extinguisher
s	Locking Fuel Cap
o	Travel Speed Limiter
o	Integrated Tire Pressure Monitoring System
o	Extreme Cold Climate Package (Fuel, Engine and Hydraulics)
o	Customized Colors or Labels
s	Lockable Battery Disconnect Switch
s	Steer Wheel Lug Nut Protection
o	Rear Lifting Eyes
LIGHTS	
s	2 Front Fender Mounted LED Lights
s	2 Front Cab Mounted LED Lights
s	2 Rear Cab Mounted LED Lights
s	2 Mast Mounted LED Working Lights
o	Indicator and Hazard lights
o	Rotating Amber Beacon
o	Additional LED Lights

# PRODUCT SPECIFICATIONS FORKLIFT TRUCKS || SCP300H4

## WORKING RANGE

SPECIFICATIONS		
<b>GENERAL</b>		
Rated Load Capacity	66,000 lbs	30 000 kg
Load Center	48"	1 220 mm
Load Distance	48"	1 220 mm
Wheelbase	177"	4 500 mm
Hydraulic Tank Capacity		
<b>Main</b>	87 gal	330 l
<b>Brake</b>	26 gal	100 l
Fuel Tank Capacity	105 gal	400 l
<b>WEIGHTS</b>		
Total Truck Weight without Load	93,000 lbs	42 200 kg
Axle Loading with Load		
Front	148,000 lbs	67 200 kg
Rear	11,000 lbs	5 000 kg
Axle Loading without Load		
Front	46,300 lbs	21 000 kg
Rear	46,700 lbs	21 200 kg
<b>WHEELS</b>		
Tire Type	Pneumatic	
Tire Size		
Drive	16.00-25	
Steer	16.00-25	

## LIFTING PERFORMANCE

PERFORMANCE		
<b>SPEED</b>		
Travel		
With Load	15.5 mph	25 km/h
Without Load	17.4 mph	28 km/h
Lifting		
With Load	49 ft/min	0.25 m/s
Without Load	59 ft/min	0.30 m/s
Lowering		
With Load	79 ft/min	0.40 m/s
Without Load	79 ft/min	0.40 m/s
<b>DRAWBAR</b>		
Pull-Max	44,500 lbf	198 kN
<b>GRADEABILITY @ 1 MPH (1.6 KM/H)</b>		
With Load	26%	

POWERTRAIN		
<b>ENGINE</b>		
Type	Cummins QSB 6.7 Diesel	
Emmissions Type	EPA Tier 4 Final	
Output		
Rated	260 hp	194 kW
Governed Speed	2,200 rpm	
Cylinders		
Number	6	
Disp	6.7 l	
Turbocharger	Variable geometry	
<b>ALTERNATOR</b>		
Amps	24V	120A
Drive Axle	Kessler D91	
Transmission	Dana TE17	
<b>GEARS</b>		
Forward	3	
Reverse	3	
<b>BATTERY</b>		
Capacity	2 x 12V 165 Ah	
<b>BRAKES</b>		
Service	Wet Disc	
Parking	Dry Disc	
<b>TANK CAPACITY</b>		
DEF	10 gal	38 l

MAST		
TYPE	Duplex	
*Height Maximum	157"	4 000 mm
*OALH	172"	4 360 mm
*Extended	248"	6 305 mm
*Freelift	-	-
Fork Type	Pin	
Carriage Type	Hook	

\* All imperial numbers have been rounded to the nearest whole number.  
\* Multiple masts heights available up to 275" lift height.

In the interest of continual equipment development, SANY Canada Ltd. reserves the right to change these specifications at any time without prior notification.



**MONTREAL (Head office)**  
19151 A, Cruickshank Avenue  
Baie-D'Urfé (Québec) H9X 3N9

Phone: 418 694-4223  
Toll free: 1 866 421-4223  
info@elevex.ca



**QUEBEC**  
1279, Paul-Émile Giroux St. Suite 200  
Québec (Québec) G1C 0K9

**SAGUENAY**  
2305, Alexis-Le-Trotteur St.  
Jonquière (Québec) G7X 9H8



[elevex.ca](http://elevex.ca)