

NOBLELIFT
CANADA  INC.

WE PROMISE | WE DELIVER

 ISO9001 / ISO14001
CE Certificate

CBT 15

*Electric Stand-up
Counterbalanced Lift Trucks*

1500kg / 3300lbs



 **ELEVEX™**
Material Handling Solutions



The Noblift **CBT15** Stand Up Counterbalanced Forklift is your ideal choice for dock applications, narrow aisle or confined corner such as drive-in rack, container applications for distribution centers, warehouses, manufacturing, retail stores and etc. Small turning radius comparing to traditional Counterbalanced forklifts, compact footprint and agile steering allows for precise maneuvering in tight spaces.



RUGGED DESIGN POWERFUL PERFORMANCE

Standard, dual independent AC drive motors with separate drive controllers provide optimal maneuverability while turning.

AC drive and German gearbox technology ensure excellent travel speed and control with CANbus communication, no maintenance and long service life.

SAFETY


Tilt control system:

can limit the tilt of the goods when the forks are high lifted to prevent roll over, and there is a one-button **FORK TILT** function to ensure safety.



Break & Presence Pedal:

Promotes safe operation with a dual-pedal design that stops operators from using only one foot to operate the truck. Protects both the truck and the operator by automatically applying the brake when the operator's left foot is removed from the brake pedal. The roomier cabin and ability to adjust the position of the feet provide postural relief during travel.

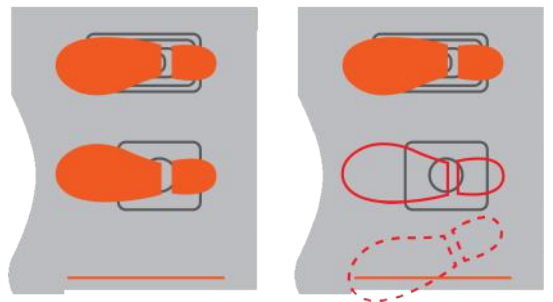


Safety protection pedal:

When the operator steps down the protection pedal, the forklift will slow down.



Automatic deceleration when turning to prevent overturn accidents caused by excessive turning speed

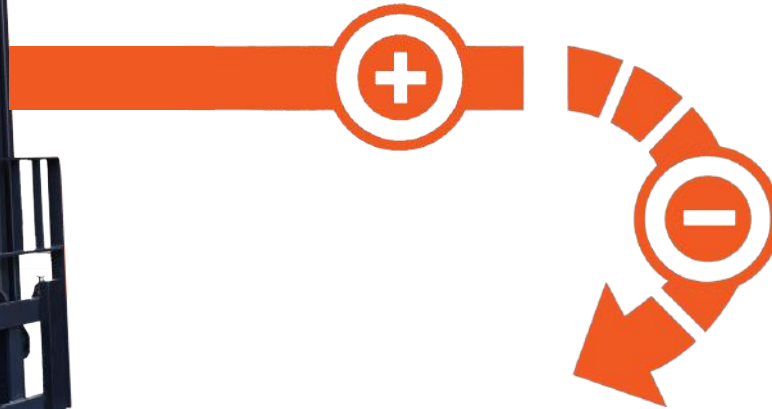

EASY OPERATION, EXCELLENT VIEW

The side stand design is convenient for the operator to get on and off the vehicle, especially suitable for the working conditions with picking function, while providing a wide visibility and reducing the blind area of operation.

Angled columns and overhead guards design and open view mast gives operators a clear line of sight to the load for increased efficiency and reduced safety risks.



The multifunctional integrated handle not only has lifting, lowering, tilting and side shifting, but also forward and backward shifting through the handle control, which is fast and convenient to use.



The arm rest provides a 6cm/2inch adjustment range to improve the comfort of operators at different heights.



Ergonomic design brackets & Hip pad enhances operator comfort while providing flexibility to reposition throughout the shift, hugging the body with contoured padding.



The floor suspension system adapts to the weight of operator and provides impact and vibration protection.

Engineered for reliability and performance, these forklifts offer exceptional visibility, ensuring precision and safety in a variety of applications, from loading trailers to navigating through busy warehouse aisles. Say good bye to downtime and welcome consistent productivity for your business.



TECHNICAL DATA IN LINE WITH VDI 2198

IDENTIFICATION

1.1	Manufacturer				NOBLELIFT	
1.2	Manufacturer				CBT15	
1.3	Power				Electric	Electric
1.4	Operator type				Stand	Stand
1.5	Load capacity		Q(kg)	lbs	1500	3307
1.6	Load centre	fork face to load CG	c(mm)	in	500	19.7
1.8	Load distance	Centre of wheel to fork face	x(mm)	in	330	13
1.9	Wheelbase		y(mm)	in	1158	45.6

WEIGHTS

2.1	Weight	Include battery	kg	lb	4150	9149
2.2	Axle load with max. battery	Without load front	kg	lb	2230	4916
		Without load rare	kg	lb	1920	4233

TYRES

3.1	Tyre type	Pressed-on solid			Pressed solid tire	Pressed solid tire
3.2	Tyres	Load side	mm	in	Ø 406 x 178 x 267	Ø 16 x 7 x 10.5
3.3	Tyres	Power unit side(steer)	mm	in	Ø 254 x 127 x 165	Ø 10 x 5 x 6.5
3.5	Castor wheel	Number(x=drive) front/rear			2 x /2	2 x /2
3.6	Track width	Load side	b10(mm)	in	952	37.5
3.7	Track width	Power unit side	b11(mm)	in	171	6.7

DIMENSIONS

4.1	Tilt	Forward/backward	angle	deg	3.5/5.5	3.5/5.5
4.2	Mast	Collapsed height	h1(mm)	in	2575	101.4
4.3	Free lift	w./w.o.load backrest	h2(mm)	in	2050	80.7
4.4	Lift height		h3(mm)	in	6200	244.1
4.5	Extended mast height	w./w.o.load backrest	h4(mm)	in	7116	280.2

4.7	Overhead guard height	Standard	h6(mm)	in	2260	89
4.8	Standing platform height		h7(mm)	in	260	10.2
4.20	Headlength		l2(mm)	in	1700	66.9
4.21	Width overall	Power unit side	b1(mm)	in	1130	44.5
4.22	Fork dimensions	Optional lengths	thxwxl(mm)	in	35x100x920	1.4x3.9x36.2
4.23	Fork carriage	ISO, FEM, ITA			2A	2A
4.24	Width across forks	Range	mm	in	200-860	7.9-33.9
4.31	Ground clearance	Lowest point, below mast	m1(mm)	in	50	2
4.32	Ground clearance	Centre wheelbase	m2(mm)	in	100	3.9
4.33	Working aisle width	1000x1200 crosswise	Ast(mm)	in	3060	120.5
4.34	Working aisle width	800x1200 lengthwise	Ast(mm)	in	3185	125.4
4.35	Turning radius	800x1200 lengthwise	Wa(mm)	in	1406	55.4





Performance Data						
5.1	Travel speed - standard	w./w.o load power unit first	km/h	mph	11/11	6.8/6.8
5.2	Lift speed	w./w.o load	m/s	fps	0.32/0.45	1.05/1.48
5.3	Lower speed	w./w.o load	m/s	fps	0.43/0.40	1.41/1.31
5.4	Brakes	Service			Foot-motor	Foot-motor
		Parking			Auto-Electric	Auto-Electric

Motors						
6.1	Traction motor	(6. min. rating)	kW	kW	2x5.5	2x5.5
6.2	Lift motors	(15%) on time	kW	kW	11	11
6.3	Max. battery size	DIN 43531/35/36 A, B, C, no	l x w x h (mm)	in	410x980x785	16.1x38.6x30.9
6.4	Battery capacity	Nominal capacity 5h	V/Ah	V/Ah	36/700	36/700
6.5	Battery weight	Minimum	kg	lb	900	1984

Other						
8.1	Type of controller				AC	AC



Mast Table VDI 2198											
	Type			4000		5260		5720		6200	
4.2	Mast	h1	mm/in	1840	72.4	2260	89	2415	95.1	2575	104.4
4.3	Free lift	h2	mm/in	1315	51.8	1735	68.3	1890	74.4	2050	80.7
4.4	Lift height	h3	mm/in	4000	157.5	5260	207.1	5720	225.2	6200	244.1
4.5	Extended mast height	h4	mm/in	4916	193.5	6176	243.1	6636	261.3	7116	280.2

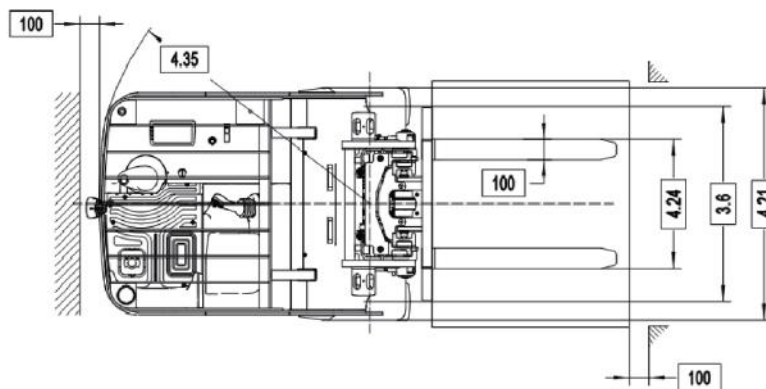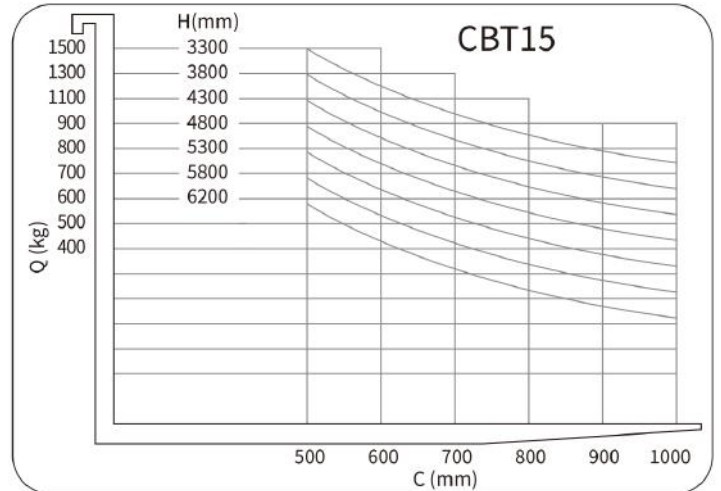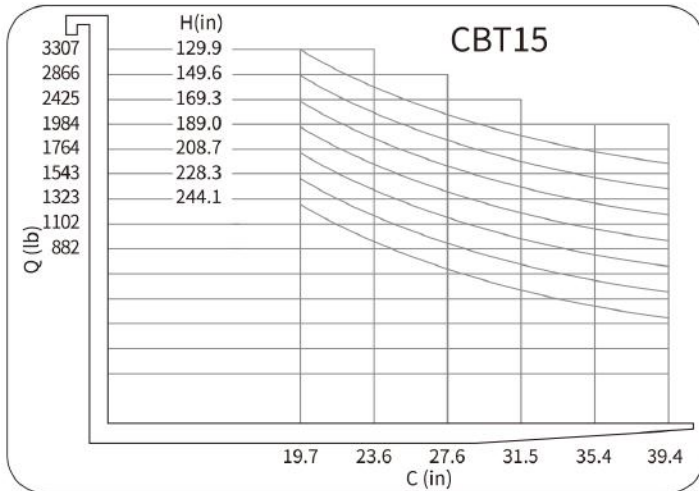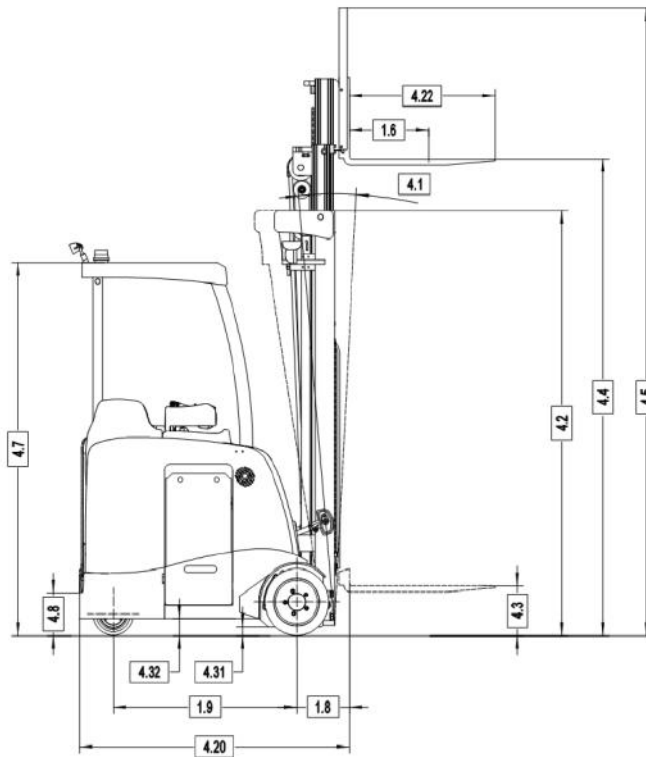

NOBLELIFT
CANADA INC.



MONTREAL (Head office)

19151 A, Cruickshank Avenue
Baie-D'Urfé (Québec) H9X 3N9
Phone: 418 694-4223
Toll free: 1 866 421-4223
info@elevex.ca
elevex.ca

QUEBEC

1279, Paul-Émile Giroux St. Suite 200
Québec (Québec) G1C 0K9

SAGUENAY

2305, Alexis-Le-Trotteur St.
Jonquière (Québec) G7X 9H8

